

AccuVEYOR[®] AVs - SERIES

Time delay

- Multi purpose system
- Patent pending design
- Creates time delay
- Tremendous conveyor belt length
- Compact design
- Built to suit your needs
- Low pressure accumulator
- Various configurations possible
- First in / First out



ACCUVEYOR® AVs - SERIES

PPI

The AccuVeyor® AVs is an accumulation/storing system, designed to create long conveyor belt length on a small footprint. The AccuVeyor® AVs is one of the youngest members of the AccuVeyor® Family which can offer solutions in many industries. The AccuVeyor® AVs is designed to convey individual products in a single lane in order to create "time" needed in various processes like cooling, accumulation and drying. Its compact and simple design makes it an innovative solution really built to suit your needs. The AccuVeyor® AVs saves valuable floor space compared to traditional horizontal systems.

Storing principle

The AccuVeyor® AVs storing principle is based on spiral conveying, up- and downwards in one tower only.


The AccuVeyor® AVs creates time, simply by using conveyor belt length between entering and discharging the system. This means that the products will enter and discharge the conveyor on FIFO basis. The time, dependent of the speed, is mainly created by the total conveyor belt length which can go up to a maximum of 100 meters.

The AccuVeyor® AVs single belt system is driven by one drive only. The AccuVeyor® AVs can be used as curing, drying or cooling tower or for any other application in your process.

Technical specifications

- Total conveyor length up to 100 m
- Chain track width 100, 140 or 200 mm.
- Load capacity suited for filled products.
- In- and out feed at same height, dependent on configuration.
- Inclination angle customised to suit the application.
- Speed customised to suit the application.
- Parallel and head to head transfers possible.


Possible configurations



Configurations

- Built to suit your needs.
- The AccuVeyor® AVs comes in full wash down stainless or economical painted material configuration.
- There is a single belt configuration available.
- Small in- and out feed height differences*.

** Height difference depending on configuration and pitch, exact difference available on request.*

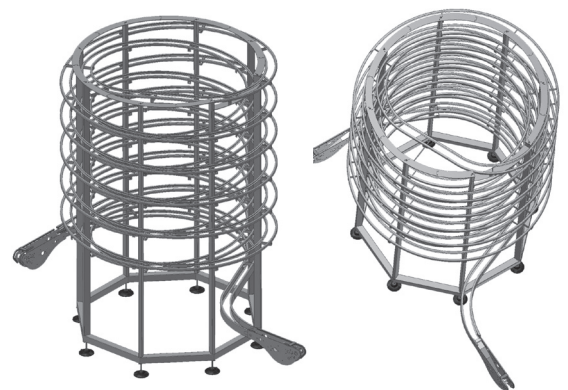

More info

- For Spiral Elevators: www.spiralveyor.com
- For Accumulation Systems: www.accuveyor.com
- For Modular Conveyors: www.ambaveyor.com

AmbaFlex
SCIENCE IN SPIRALS

AmbaFlex Headquarters | EUROPE
mail@ambaflex.com
phone +31 229 285 130

AmbaFlex NORTH AMERICA | USA
info@ambaflex.com
phone (877) 800 1634

AmbaFlex JAPAN
japansales@ambaflex.com
phone +81 3 6908 7980

AmbaFlex CHINA
china@ambaflex.com
phone +86 21 62 30 65 00

LEADING SPIRAL CONVEYOR SOLUTIONS