









Fish & Seafood

Fruit & Vegetables Meat & Poultry

Dairy Food

Convenience Food

Vibratory rotary filler

Easy filling of various products

By means of vibration, the machine fills difficult-to-fill products into numerous types of containers, e.g. cans, glass jars or PET containers.

The product is distributed to the individual filling stations by a multihead weigher. Vibration ensures that the product is entered into the containers, safely and efficiently.


The vibratory rotary table is available with 9, 14, 18 or 24 filling stations to match specific needs for speed and volume.

Filling of all kinds of divisible products into glass jars, cans or PETs in various shapes; round, square, elliptical, etc. A solution with stamper can be incorporated.

Visit cabinplant.com



Cabinplant

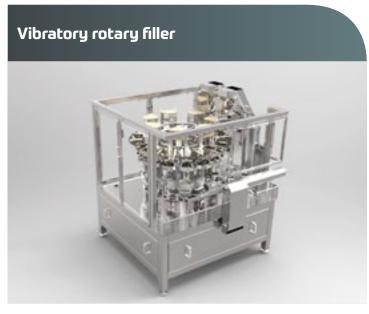

Accurate filling

Cabinplant vibratory rotary filler forms a natural part of a packing line for cans/glass jars and allows accurate filling of difficult products or large portions through small container openings, e.g. cans, glass jars or PET containers.

Products include peaches, apricots, pickles, meatballs, sausages, olives and product mixes.

Capacity				
	VF 9	VF 14	VF 18	VF 24
Fillings	90	140	180	240

Dimensions mm					
	VF 9	VF 14	VF 18	VF 24	
Length	1050	1550	1550	1550	
Height	1700	1800	1800	1800	
Width	1100	2000	2000	2000	
Height conveyor	1050	1050	1050	1050	

Dimensions may vary depending on type of use.

Advantages

- · Vibration for optimal filling
- High speed
- · Easy cleaning
- Quick and easy change of can/ glass jar types and designs
- Stainless steel machine housing
- "No can no fill" system

Application

- Peaches
- Stone fruits
- Antipasti
- Herring
- Feta cubes
- Hot dog sausages
- Cocktail sausages
- Meatballs

Functionality

- Continuous filling of products from a dosing unit, e.g. multihead weigher
- Adjustable vibration of containers during filling
- Infeed and discharge star wheels for correct placeing in the vibratory rotary filler
- Stand-alone electrical control system or integrated line control