




Depositor for Biscuits

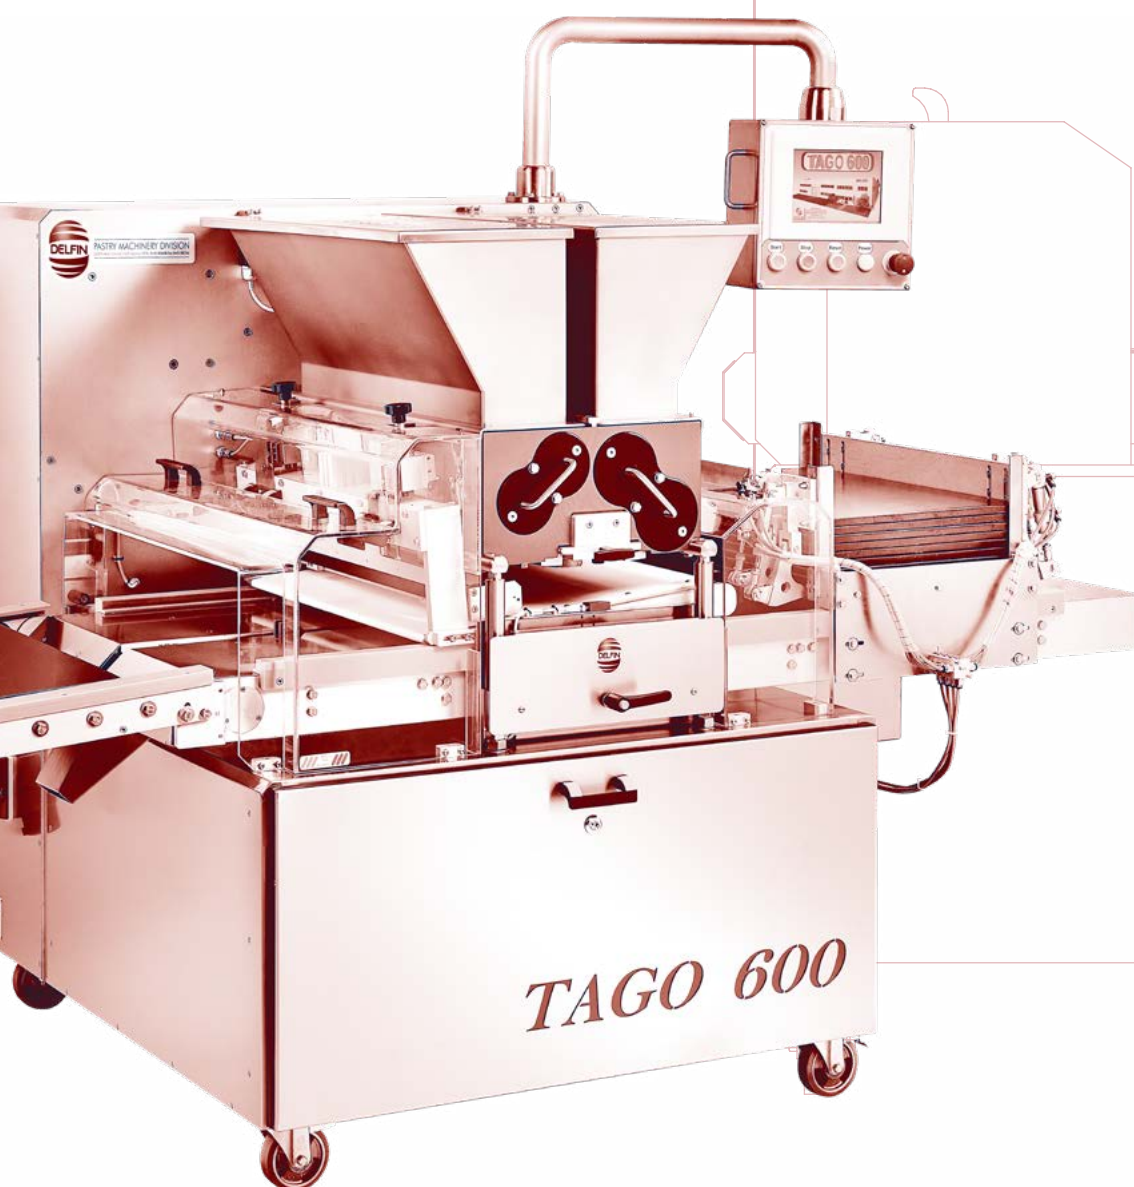

TAGO

MADE IN ITALY



Depositor TAGO



Two colour & co-extruded biscuits depositing machine

- Machine structure in stainless steel and aluminum anticorodal;
- PLC complete of 400 memories;
- Servo driver motors;
- Electronic speed adjustment dosing rollers;
- Bi-directional tray direction electronically controlled;
- Automatic table height adjustment;
- Double extruding head in three variants.
- After sales remote control connection;
- Automatic tray dispensing.



Colatrice per biscotti bi-colore & biscotti ripeni

- Struttura in acciaio inox e alluminio anticorodal;
- PLC completo con 400 memorie;
- Motorizzazione tramite motori brushless;
- Regolazione elettronica della velocità dei rulli;
- Direzione della teglia bidirezionale controllata elettronicamente;
- Regolazione automatica dell'altezza del tavolo;
- Doppia testa in tre varianti;
- Assistenza tramite connessione remoto;
- Caricamento teglia in automatico.



Cortador de galletas bicolor y rellenas

- Estructura en acero inoxidable y aluminio anticorodal;
- PLC completo con 400 memorias;
- Motorización mediante motores sin escobillas;
- Control electrónico de la velocidad del rodillo;
- Dirección de oscilación bidireccional controlada electrónicamente;
- Ajuste automático de la altura de la mesa;
- Cabezal doble en tres variantes;
- Servicio a través de conexión remota;
- Carga automática de bandejas.



Dresseuse pour biscuits bicolores et fourrés

- Structure de la machine en acier inoxydable et aluminium anticorodal;
- PLC complet de 400 mémoires;
- Motorisation par moteurs sans balais;
- Réglage électronique de la vitesse des rouleaux de dosage;
- Direction bidirectionnelle du plateau contrôlée électroniquement;
- Réglage automatique de la hauteur de la table;
- Tête double en trois variantes;
- Service par connexion à distance;
- Chargement automatique des bacs.

Length	1410 mm
Height	1730 mm
Width	1370 mm
Weight	520 kg
Installed power	3 kW
Number of exits	9
Hopper capacity	40 lt
Max. tray size	800x600 mm
Hourly production quantity*	± 100-140kg/h

*The amount changes according to texture, shape, size, and weight of the cookie



Max. tray passage
under the nozzles
90mm





Cycles per minute
20 - 40









Voltage
400 Volts / 3 phase
N + E / 50Hz



Machine complaint
with EC standards

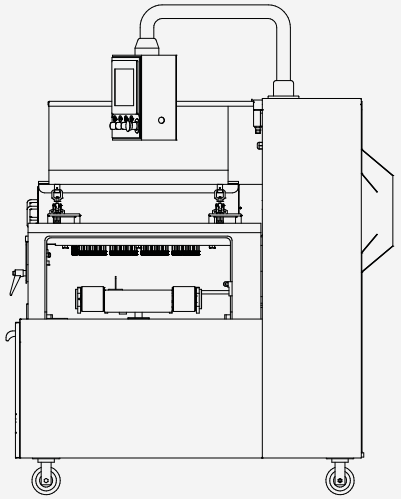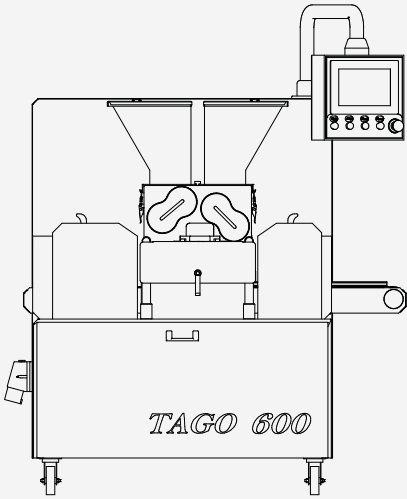

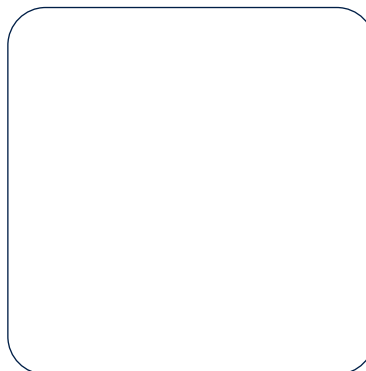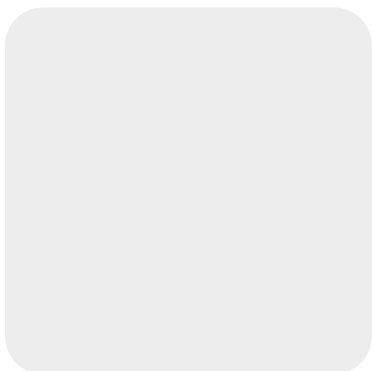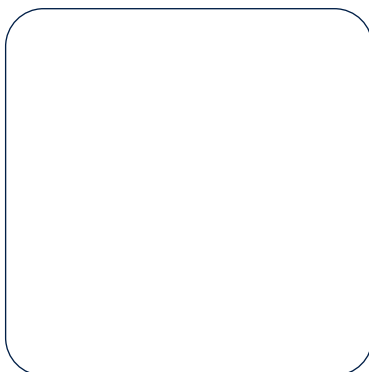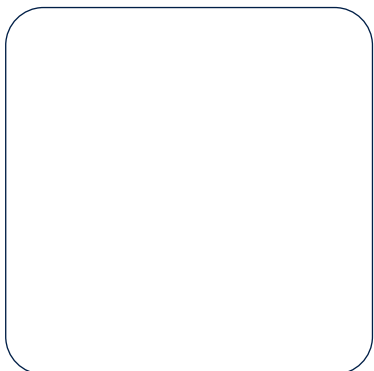

Delfin srl
Via G. Keplero, 18
36034 Malo, VI - Italy

+39 0445 58 06 88
✉ info@delfin.it
🌐 www.delfin.it

