

DELTA FLOBAG

FLEXIBLE PACKAGING SOLUTIONS



MAIN FEATURES



- 1 Hygienic design
- 2 Electronic machine with commercial available components
- 3 Misplaced detection
- 4 No product no bag

BENEFITS

- 1 Inhibition of bacterial proliferation - Minimised cleaning time
- 2 Higher reliability components - Easy maintenance
- 3 No products damaged or trapped by the sealing jaws - Reduced product waste - No machine stoppages for out of phase products
- 4 Reduced film waste (no empty bag)

The Delta Flobag is the most efficient solution to shrink and vacuum processed meat and cheese. The stainless steel and hygienic design allows the machine to work in harsh and wash-down environment both as stand-alone flow wrapping machine with long-dwell technology and integrated in complete solution to meet different market needs. All Flobag machines are electronically controlled and equipped with variable cut off length control to minimizes and optimizes film usage.


TECHNICAL DATA

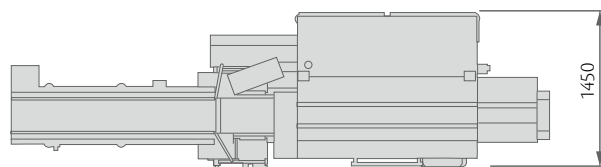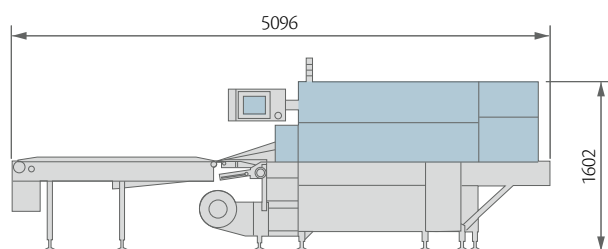

March 2022 - DELTA FLOREN

| | |
|-----------------------------|--|
| Machine Speed | Up to 60 cycles per minute. Production output depends on film sealability and product characteristics |
| Film Cut-Off | Min 150mm - 6" / Max 800mm - 31.5" Depending on film and product characteristics |
| Wrapping Materials | Shrink barrier films, laminated, co-extruded and all sealable films |
| Film Reel Max Weight | Depending on film reel width, up to 75 kg - 165 lbs |
| Electronic Platform | Industrial PC |
| Power Requirement | From 220 to 480 V, 50/60 Hz, 7kVA |
| Compressed Air | 6 bar, 200 l/min |
| Machine Weight | 1500 Kg - 3300 lbs |
| PRODUCT DIMENSIONS | |
| length | Up to 650mm - 25.6" standard |
| width | 300mm - 11.8" standard (jaws 345mm - 13.6") 320mm - 12.6" on request (jaws 445mm - 17.5") |
| height | Up to 180mm - 7.0" standard Up to 160mm - 6.3", with small product traps |
| FILM REEL DIMENSIONS | |
| coreø | 76.2mm - 3" standard 152.4mm - 6" on request |
| outerø | 350mm - 13.8" standard |
| width | 800mm - 31.5" standard 1000mm - 39.4" on request |

Ilapak reserves the right to make any changes to the described machine characteristics.



ILAPAK INTERNATIONAL S.A.

P.O. Box 756 • CH 6916 Grancia • Switzerland

Phone: 0041 (0)91 960 5900 • Fax 0041 (0)91 960 5992

marketing@ilapak.com • ilapak.com • ima.it

