





## KOMPAKTA POUCH MAKING MACHINE



Bottom punching

Bottom sealing and cooling

Side sealing

## SHAPE YOUR POUCH AUTOMATICALLY

Loaded with two reels for the front and back of the pouch and several reels for the bottom, depending on pouch size, Kompakta automatically unwinds, punches and cuts the material on reels using blades and cutters, then sealing on 3 sides to obtain the finished pouch with a feed of 2, 3 or 4 pouches.

Size changeover takes just a few minutes; punching, cutting and sealing stations are easily replaced and their position is adjusted based on the index change. Standard equipment will feature an end-of-line packer to arrange the pouches in rows and subsequently inserting them into boxes or trays.





Cutting station and pulling

Side cutting, optional stacking unit

Optional tray loading unit






HIGH-SPEED REEL REPLACEMENT FOR INCREASED PRODUCTIVITY

SIMPLE AND FAST SIZE CHANGEOVER
FOR GREATER VARIETY AND
CREATIVITY



## TECHNICAL DATA

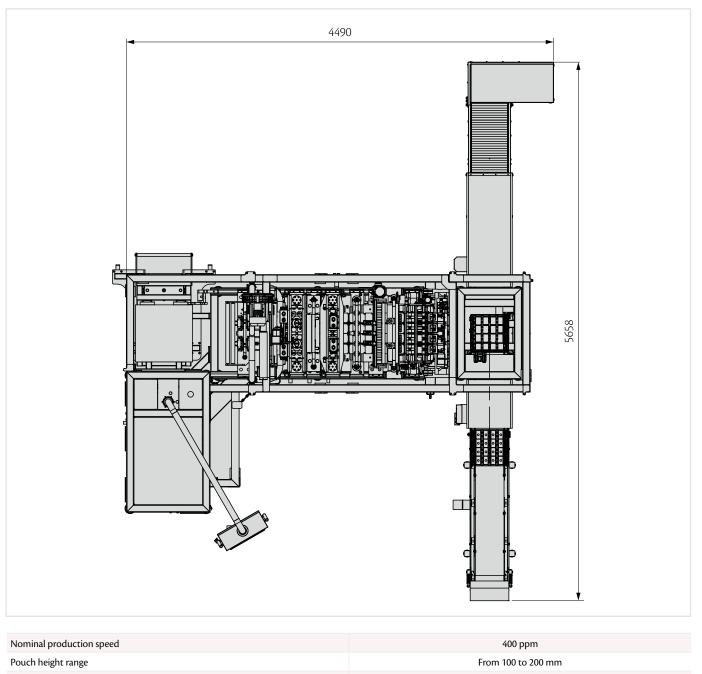

Pouch height range	From 100 to 200 mm
Pouch width range	From 70 to 150 mm
Pouch material	Triplex, Quadruplex
Total installed power	25 Kw
Weight	2000 Kg



IMA S.p.A. **FILLSHAPE division** Via Ugo Ferrandi - 43126 Parma - Italy Tel. +39 0521 1756004 dairyfood@ima.it - www.ima.it/foodanddairy



May 2019 - FIL991COMPEN