



Crumbler *HE*



HIGH EFFICIENCY



General

Ottevanger's crumble technology is based on two large, independently driven rollers. That ensures an optimum result of minimum fines with maximum crumble.

An integrated rotating feeder ensures an even distribution of the pellets to the crumble rollers. Large-scale axially and radially rifled crumble rollers rotate at equal speeds in opposite directions, and cut the pellet to a crumble. Using accurate measurement, the large 300mm crumble rollers guarantee an optimum result. The optional remote roller adjustment system increases the efficiency and simplifies the adjustment of the roller distance during production.

Features

- » housing manufactured from mild steel
- » rotating feeder from mild steel
- » two solid 300mm axially and radially rifled crumble rollers from hard cast iron (hartguss).
- » rollers independently driven
- » transmission via V-belts
- » accurate adjustment of crumble size
- » manual or remote roller adjustment
- » read-outs accurate to 0,1 mm
- » safety provision via die springs against foreign objects
- » heavy duty, closed shaft bearings
- » inspection hatch with safety switch
- » level indication included


High Efficiency Line

The development of our new High Efficiency (HE) line concentrated not only on higher performances and a more hygienic design but also lower energy consumption. The new HE line gives excellent access to all maintenance areas.

With this HE line Ottevanger takes a new step forward.

High Efficiency advantages

- » more capacity with same energy level
- » frequency controlled dual rotation feeder (by-pass function), frequency converter not included
- » rollers are exchangeable from front and the sides
- » 50% more revision options of the rollers
- » easy access for maintenance

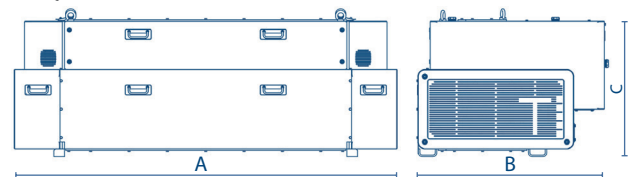

Type	Capacity Tons/hr*	Dimensions in mm				Outlet	Motorpower (kW)		
		A	B	C	Inlet (mm)		Roladjustment (Option)	Feederrol	Drive
CR 307	0 - 15*	1.276	1.216	875	612 x 142	606 x 477	0,18 / (0,25 ATEX) (1x)	0,55 (1x)	7,5 (2x)
CR 313	10 - 30*	1.876	1.216	875	1.212 x 142	1.206 x 477	0,18 / (0,25 ATEX) (1x)	0,55 (1x)	11 (2x)
CR 318	15 - 40*	2.416	1.216	875	1.752 x 142	1.746 x 477	0,18 / (0,25 ATEX) (1x)	0,55 (1x)	15 (2x)



* the final capacity depends on:

- » kind of product
- » diameter of the pellet
- » kahl hardness of the pellet
- » density
- » required dimensions of the crumble

Ottevanger Milling Engineers

Moerkapelle, Aalten and Heteren - The Netherlands
Tel. +31 79 593 22 21
E-mail: info@ottevanger.com

www.ottevanger.com



OTTEVANGER

MILLING ENGINEERS

- » Design » Engineering » Manufacturing » Construction and commissioning
- » Feed mills » Pet food plants » Aqua feed plants » Cereal processing plants
 - » Soybean processing plants » Premix and concentrate plants » Silos
 - » Bulk storage and handling systems » Electric control and automation



Ottevanger Milling Engineers B.V.

Location: Moerkapelle
Moerkapelse Zijde 32
2751 DL MOERKAPELLE
The Netherlands
Tel. +31 (0)79 593 22 21

Location: Aalten
Dinxperlosestraatweg 62
7122 AH AALTEN
The Netherlands
Tel. +31 (0)543 472 688

Location: Heteren
Komkleiland 4
6666 MG HETEREN
The Netherlands
Tel. +31 (0)26 47 906 99

www.ottevanger.com
info@ottevanger.com