


Endload Cartoner CAM

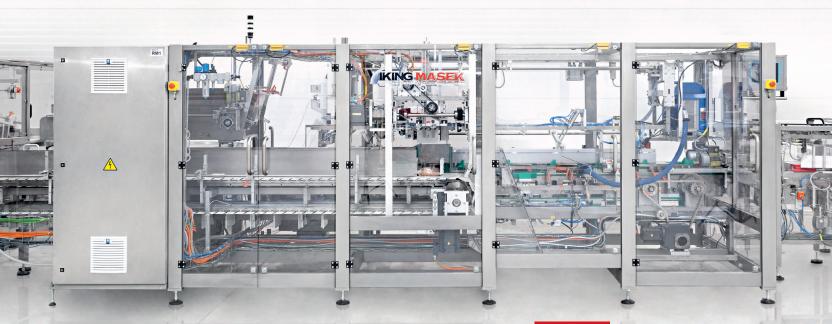

Viking Masek's CAM cartoners are fully servo driven, automatic continuous or intermittent endload cartoners, carefully designed to match specific applications on exact speed and size range requirements.

max. speed intermittent

continuous

60 cpm

240 cpm

carton size

intermittent

max: 400×600×300mm min: 50 × 80 × 30 mm

continuous

max: 225×300×100mm min: 50 x 80 x 20 mm










Endload Process















Endload Cartoner CAM In Detail

Viking Masek endload cartoning solutions are carefully designed to match customers' applications based on speed and size-range requirements. The CAM cartoner is a fully servo driven, highly flexible, economical and robust cartoner. The continuous or intermittentmotion modes permit compact layouts, simple change-overs and a broad range of applications. Featuring easy change-over, various closure systems and product feeders, our customized solutions ensure guaranteed performance.

features

- > Hot melt, hot air systems or tuck closure > Various styles of closure systems
- Easy format change-over
- > Inclined carton magazine
- > Controlled carton supply
- Servo drives >
- > Rugged stainless steel construction
- Vacuum pump included >
- > Jogging control
- Safety guarding
- Off-the-shelf components
- Siemens or Allen Bradley controls
- IP54 >
- Excellent accessibility
- Ergonomic design

options

- > Fully motorised size change-over
- > Damaged carton rejection
- > Open flap rejection
- > Different frame sizes to accomodate large carton range
- > Remote control
- > Extended carton magazine
- > Special electronics and voltages
- > IP65 washdown construction
- > Various types of feeders

Max. speed

i: 60 cpm c: 220cpm

6 bar

Weight

1500-2500 kg

Power supply


Air pressure


i: 8-12 kVA c: 15 kVA









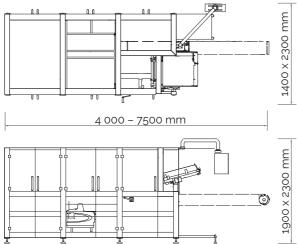



Viking Mašek, a.s. | Průmyslová 1747 | 258 01 Vlašim | Czech Republic

Phone + 420 317 850 500 | Email info@masek.cz | Website www.masek.cz, www.vikingmasek.cz