

Topload Cartoner CLM



Viking Masek's CLM machines are a family of carton closing machines. We offer straight-line or right-angle units to close one, two or three flaps of the cartons. The unique turning mechanism provides gentle handling of the cartons and of the products inside.

max. speed

200 cpm


carton size $^{\text{max}}$ $300 \times 400 \times 200 \text{ mm}$ $^{\text{min}}$ $50 \times 80 \times 25 \text{ mm}$







Topload Process

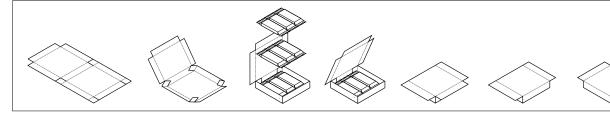

Topload Cartoner CLM In Detail

One, two or three flap, carton closing machine are designed to handle all types of board. Whether manufactured from thin or heavy gauge chipboard or corrugated micro-fluted board finished with high quality printing, the CLM carton closers will produce perfectly formed, square and unblemished cartons that are secure and strong for shipping, yet suitable for shelf or freezer display.

Max. speed

Weight

Air pressure

6 bar

200 cpm

Power supply

900–1 300 kg 6–12 kVA

features

- One, two or three flap closing configuration
- > Lock-style, hot melt or hot air systems
- > Easy format change-over
- Driven infeed to adapt to random carton flow
- > Servo drives
- Rugged stainless steel construction Jogging control
- > Safety guarding
- Off-the-shelf components Siemens or Allen Bradley controls
- > IP54
- > Excellent accessibility
- > Speed and glue adjustment throught the HMI
- > Gentle carton rotation

options


- Various styles of infeed/outfeed conveyors
- > Straight-line or right-angled contruction
- > Damaged carton rejection
- Different frame sizes to accomodate large carton range
- > Remote control
- > Special electronics and voltages
- > IP65 washdown construction







Machine drawings



Europe, Asia, Africa, Australia

Viking Mašek, a.s. | Průmyslová 1747 | 258 01 Vlašim | Czech Republic

Phone + 420 317 850 500 | Email info@masek.cz | Website www.masek.cz, www.vikingmasek.cz

